

TCXO & VCTCXO



HUAFENG
CRYSTAL

HTD Series

- Temperature compensated crystal oscillator
- HCMOS / TTL output
- Clipped sinewave output
- 5.0V / 3.3V supply voltage
- Internal or external voltage control option available



ELECTRICAL SPECIFICATIONS

	TTL/HCMOS	CLIPPED SINEWAVE
Frequency Range	1.200 to 100.000MHz	9.600 to 35.000MHz
Load Drive Capability	10TTL Load or 15pF HCMOS Load Max	10kOhms//10pF
Output Voltage	Logic High(V_{OH}) w/TTL:2.4V _{cc} Min w/HCMOS:90% of V _{cc} Min Logic Low(V_{OL}) w/TTL:0.4V _{cc} Max w/HCMOS:10% of V _{cc} Max	1.0Vp-p Min [V _{cc} :5.0V _{cc}] 0.8Vp-p Min [V _{cc} :3.3V _{cc}]
Frequency Stability	vs.Operating Temperature Range vs.Input Voltage(± 5%) vs.Load(± 10%)	See Table 1 ±0.3ppm Max ±0.3ppm Max
Supply Voltage(V _{cc})	5.0V _{cc} ± 5%, 3.3V _{cc} ± 5%	5.0V _{cc} ± 5%, 3.3V _{cc} ± 5%
Input Current	1.200 to 27.000MHz 20mA Max 15mA Max 27.001 to 100.000MHz 35mA Max 30mA Max	9.600 to 27.000MHz 2mA Max 1.5mA Max 27.001 to 35.000MHz 3mA Max 2.5mA Max
Rise / Fall Time	5nsec Max 4nsec Max	
Duty Cycle	50 ± 10(%)	
Internal Trim(Top of Can)	±3ppm Min	
Control Voltage(External)	2.5V _{cc} ± 2.0V _{cc} (V _{cc} :5V _{cc}), 1.65V _{cc} ± 1.0V _{cc} (V _{cc} :3.3V _{cc}) Positive Transfer Characteristic	
Frequency Deviation	±5ppm or ± 10ppm Minimum Over Control Voltage	
Aging(at 25°C)	± 1ppm/year Max	

■ PART NUMBERING GUIDE



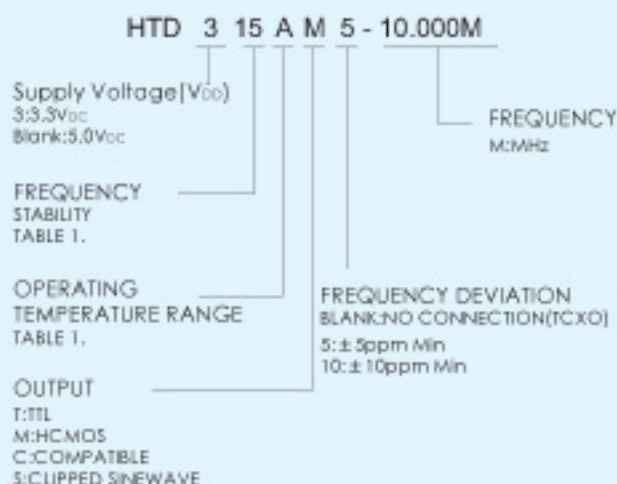


TABLE 1.

OPERATING TEMPERATURE		FREQUENCY STABILITY (±PPM)								
		1.5PPM	2.0PPM	2.5PPM	3.0PPM	3.5PPM	4.0PPM	4.5PPM	5.0PPM	
Range	Code	15	20	25	30	35	40	45	50	
0-50°C	A	*	*	*	*	*	*	*	*	
-10-60°C	B	*	*	*	*	*	*	*	*	
-10-70°C	C	△	*	*	*	*	*	*	*	
-20-70°C	D	△	*	*	*	*	*	*	*	
-30-60°C	E		△	*	*	*	*	*	*	
-30-70°C	F		△	*	*	*	*	*	*	
-30-75°C	G			*	*	*	*	*	*	
-40-80°C	H					*	*	*	*	
-40-85°C	I					*	*	*	*	

* Denotes Availability
△ not available in 25MHz-100MHz

■ MECHANICAL DIMENSIONS

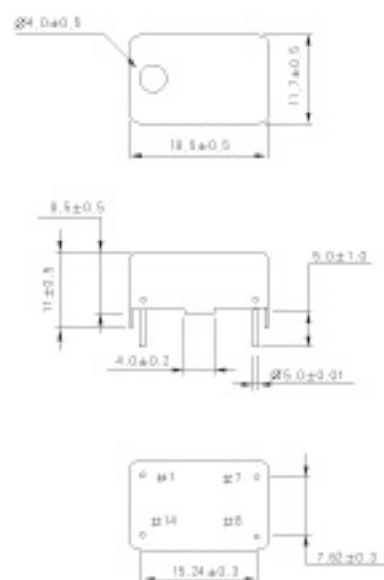

Pin CONNECTION

- #1 V_{CC} or N.C
- #7 GND
- #8 OUTPUT
- #14 V_{DD}

■ ENVIRONMENTAL / MECHANICAL SPECIFICATIONS

PARAMETER	SPECIFICATIONS
Seal Integrity	Bubble test in Perfluorocarbon at +125°C ± 5°C for 60 seconds minimum (Internal Crystal).
Solderability	Sn63 Solder dip at +230°C ± 5°C 5 seconds/95% coverage.
Marking Permanency	10 Stokes with brush after 1 minute soak in solvent, 3 times.
Shock	Pandom drop on hard wooden plate 3 times form a height of 50cm
Vibration	Frequency with an amplitude of 1.5mm sweeping between 10Hz to 55Hz within 1 minute (approximately) for 2 hours minimum on each axis [X, Y and Z] for a total of 6 hours.